


# SiteOne Cable & Antenna Analyzer

Type 3028



## Product Introduction

The COMM-connect SiteOne Cable & Antenna Analyzer is a truly handheld analyzer covering all major communication bands from 50 kHz to 4400 MHz.


It has a large number of measurement screens available, in order to accommodate all the different parameters in an antenna installation. Measurement screens can show 2 simultaneous graphs, from 2 different parameters in order to bring further clarity to your measurements.

The built-in storage is accessible through the USB connector, and will show up on your PC as a temporary drive. The size of the internal storage is large enough to hold years of measurement data. For documentation reference the instrument has a built-in real time clock. Simple multilayer menus are employed to setup and control the operation of the instrument. In order to ensure uninterrupted daily work, the instrument is equipped with Lilon cells capable of more than 4 hours of continuous work.

Accessory kit with soft carrying bag, Peli case, car charger and coax adapters for standard types are available.

## Applications/Features:

- Fast Cable & Antenna measurements
- Handheld
- Lightweight
- Rugged design
- Cost effective
- Document the performance of your installation
- Graphic display
- Large built-in storage


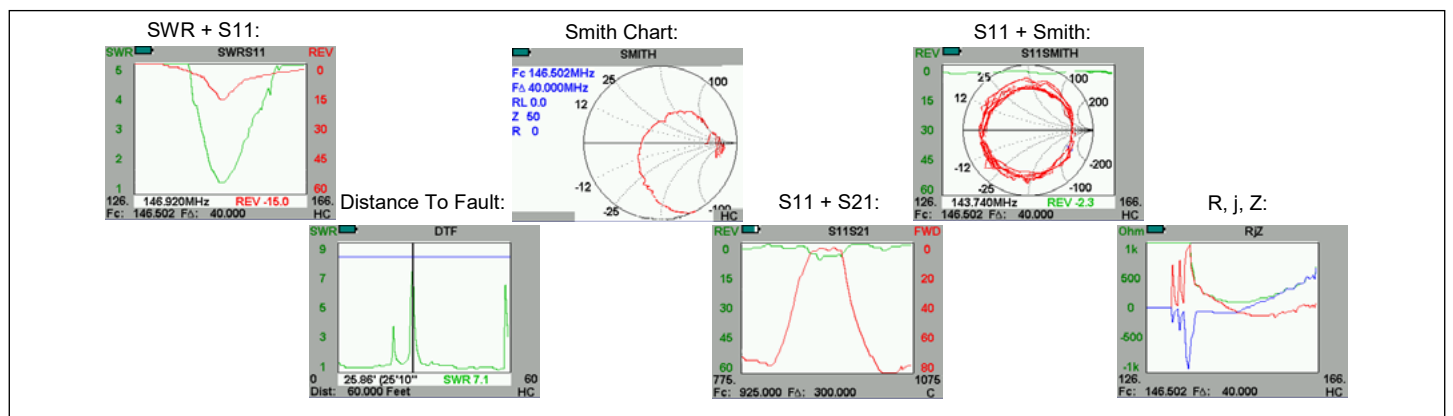


## Functions:

- Measurement modes:
  - SWR & S11
  - Distance To Fault (Selectable: Meters or Feet)
  - Smith Chart
  - S11 & S21
  - S21
  - S11 & Smith Chart
  - R, j, Z
- Colour LCD screen, visible in direct sunlight
- Battery life saving, with 'Auto Power off' function
- Built-In Real time clock
- Hold and store data on internal SSD
- Internal SSD accessible as simple USB drive on PC
- Timestamped filesystem
- Simple menu setup system

Specifications:	
Frequency Center range:	50 kHz to 4.4 GHz
Frequency Center Resolution	1 kHz
Frequency Span Range	0/5 kHz to 4.4 GHz
Frequency Span Resolution	5 Hz to 44 MHz
Frequency Accuracy	±2.5 ppm
Distance To Fault End	1 to 500 meter (1 to 1640 feet)
Distance To Fault Start	0 to 99 m (0 to 324 feet)
Distance To Fault Resolution	1 to 10 cm (0.4 to 4 inches)
Return Loss Measurement Conditions: Tx Port, Factory Calibration	50 kHz to 1 MHz: < -30 dB 1 MHz to 100 MHz: < -35 dB 100 MHz to 1 GHz: < -30 dB 1 GHz to 2 GHz: < -30 dB 2 GHz to 3 GHz: < -28 dB 3 GHz to 3.8 GHz: < -25 dB 3.8 GHz to 4.4 GHz: < -20 dB
Transmission Measurement Dynamic Range Conditions: Rx Port, Factory Calibration	50 kHz to 1 MHz: > 40 dB 1 MHz to 100 MHz: > 80 dB 100 MHz to 1 GHz: > 70 dB 1 GHz to 2 GHz: > 50 dB 2 GHz to 3 GHz: > 50 dB 3 GHz to 4.4 GHz: > 40 dB
Impedance	50 Ω
Connectors	2 x "N" Female USB Serial device (B type)
Display resolution	320 x 240 pixels
Calibration storage	EEPROM
Operating time	approx. 4 hours
Operating temperature	0 °C to +50 °C
Storage temperature	-30 °C to +50 °C
Size	165 x 82 x 31 mm
Weight	Approx. 650 grams
Compliance	89/336/EEC 92/31/EEC 93/68/EEC EN 61000-6-4:2001 EN 61000-6-2:2005

## Connectors:

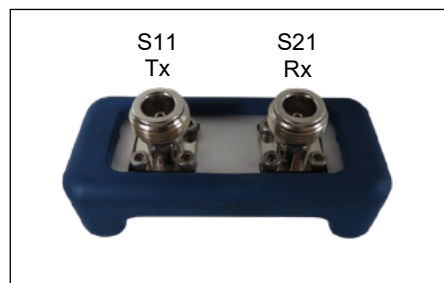

Germany

**Telemeter Electronic GmbH**  
 Joseph-Gaensler-Straße 10  
 86609 Donauwoerth  
 Phone +4990670693-0  
 Fax +4990670693-50  
 info@telemeter.de  
 www.telemeter.info

Switzerland

**Telemeter Electronic GmbH**  
 Romanshornstrasse 117  
 8280 Kreuzlingen  
 Phone +41716992020  
 Fax +41716992024  
 info@telemeter.ch  
 www.telemeter.info

Czech Republic

**Telemeter Electronic s.r.o.**  
 České Vrbné 2364  
 370 11 České Budějovice  
 Phone +420385310637  
 info@telemeter.cz  
 www.telemeter.info