

# 1-Port USB VNA - R60

## Extended Specifications



- **Patent US 9,291,657** - No test cable needed
- **Frequency range:** 1 MHz - 6 GHz
- **Measurement time per point:** 100  $\mu$ s min typ.
- **Automation programming** in LabView, Python, MATLAB, .NET, etc.
- Up to **100,001 measurement points**
- **Time domain and gating** included standard

**EXTEND YOUR REACH™**

# Specifications<sup>1</sup>

## Measurement Range

Impedance	50 Ohm
Test port connector	type N, male
Number of test ports	1
Frequency range	1 MHz to 6 GHz
Full frequency accuracy	$\pm 2.5 \cdot 10^{-6}$
Frequency resolution	20 Hz
Number of measurement points	2 to 100,001
Measurement bandwidths (with 1/3 steps)	10 Hz to 100 kHz
Cable loss measurement range	35 dB
Dynamic range <sup>2</sup>	109 dB typ.

## Measurement Accuracy<sup>3</sup>

Accuracy of reflection measurements <sup>4</sup>	Magnitude / Phase
-15 dB to 0 dB	$\pm 0.4$ dB / $\pm 3^\circ$
-25 dB to -15 dB	$\pm 1.0$ dB / $\pm 6^\circ$
-35 dB to -25 dB	$\pm 3.0$ dB / $\pm 20^\circ$
Accuracy of transmission magnitude measurements <sup>5</sup>	Magnitude
-50 dB to 0 dB	$\pm 1$ dB
Trace noise magnitude <sup>6</sup>	0.005 dB rms
Temperature dependence	0.015 dB/°C

## Effective System Data

1 MHz to 6 GHz	
Directivity	46 dB
Source match	40 dB
Reflection tracking	$\pm 0.05$ dB

## Factory-Calibrated System Data

1 MHz to 4 GHz	
Directivity	36 dB
4 GHz to 6 GHz	
Directivity	32 dB

## Uncorrected System Performance

1 MHz to 6 GHz	
Directivity	15 dB (18 dB typ.)
Source match	15 dB (18 dB typ.)

[1] All specifications subject to change without notice. [2] Measurement of  $|S_{21}|$  and  $|S_{12}|$  using two reflectometers, both being connected to the same USB hub, applies over the temperature range of  $(23 \pm 5)^\circ\text{C}$  after 30 minutes of warming-up, with less than  $1^\circ\text{C}$  deviation from the calibration temperature at high output power and IF bandwidth 100 Hz. [3] Reflection and transmission measurement accuracy applies over the temperature range of  $(73 \pm 9)^\circ\text{F}$  or  $(23 \pm 5)^\circ\text{C}$  after 30 minutes of warming-up, with less than  $1^\circ\text{C}$  deviation from calibration temperature, at 0 dBm output power and IF BW 100 Hz. Frequency points have to be identical for measurement and calibration (no interpolation allowed). [4] Reflection specifications are based on an isolating DUT. [5] Transmission specifications are based on a matched DUT. Measurement of  $|S_{21}|$  and  $|S_{12}|$  using two devices, both being connected to the same USB hub. [6] IF bandwidth 1 kHz. © Copper Mountain Technologies - [www.coppermountaintech.com](http://www.coppermountaintech.com) - Rev. 2019Q1

# Specifications<sup>1</sup>

## Test Port

Power range	-35 dBm to -3 dBm (-40 dB to 0 dB, typ.)
Power resolution	0.25 dB typ.
Power accuracy	±1.5 dB typ.
Interference immunity	+17 dBm
Damage level	+23 dBm
Damage DC voltage	50 V

## Measurement Speed

Time per point	100 µs typ.
----------------	-------------

## Frequency Reference Input

Port	Ref 10 MHz
External reference frequency	10 MHz
Input level	0 dBm to 4 dBm
Input impedance	50 Ohm
Connector type	SMA, female

## Frequency Reference Output

Port	Ref 10 MHz
Internal reference frequency	10 MHz
Output reference signal level at 50 Ohm impedance	-1 dBm to 5 dBm
Connector type	SMA, female

## Trigger Input

Port	TRIG IN / OUT
External trigger source	3.3 V CMOS, TTL compatible
Pulse width	≥1 µs
Polarity	positive or negative
Input impedance	≥10 kOhm
Connector type	SMA, female

## Trigger Output

Port	TRIG IN / OUT
Max output current	20 mA
Trigger output	3.3 V CMOS, TTL compatible
Polarity	Positive or negative
Connector type	SMA, female

[1] All specifications subject to change without notice. © Copper Mountain Technologies - [www.coppermountaintech.com](http://www.coppermountaintech.com) - Rev. 2019Q1

# Specifications<sup>1</sup>

## System & Power

Operating system	Windows 7 and above
CPU frequency	1.0 GHz
RAM	2 GB
Interface	USB 2.0
Connector type	Mini USB B
Power consumption	3.5 W

## Calibration

Recommended factory adjustment interval	3 Years
-----------------------------------------	---------

## Dimensions


Weight	0.35 kg (12.3 oz)
Length	161 mm
Width	65 mm
Height	28 mm

## Environmental Specifications


Operating temperature	+5 °C to +40 °C (41 °F to 104 °F)
Storage temperature	-50 °C to +70 °C (-58 °F to 158 °F)
Humidity	90 % at 25 °C (77 °F)
Atmospheric pressure	70.0 kPa to 106.7 kPa

# Reflection Accuracy Plots

## Reflection Magnitude Errors

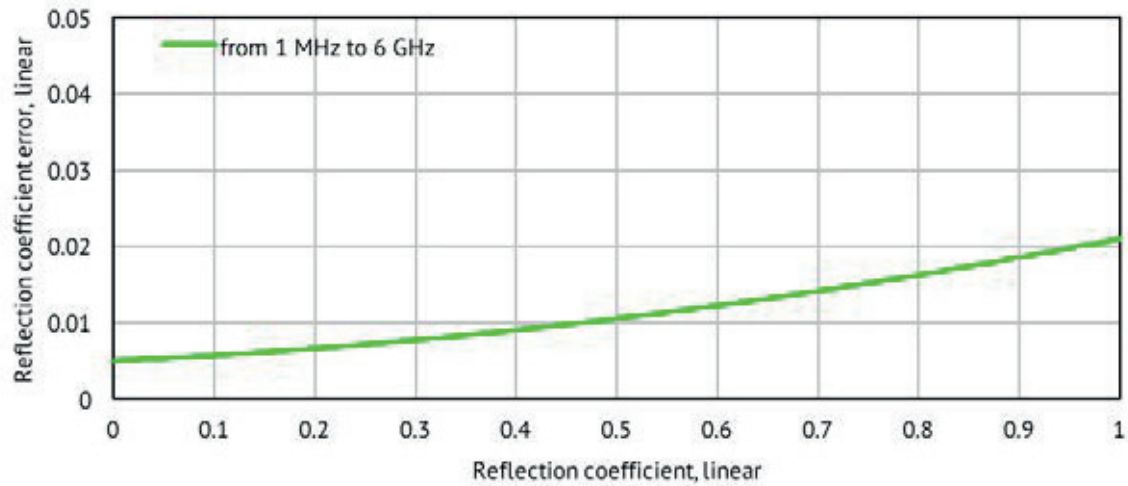

Specifications are based on isolating DUT ( $S_{21} = S_{12} = 0$ )

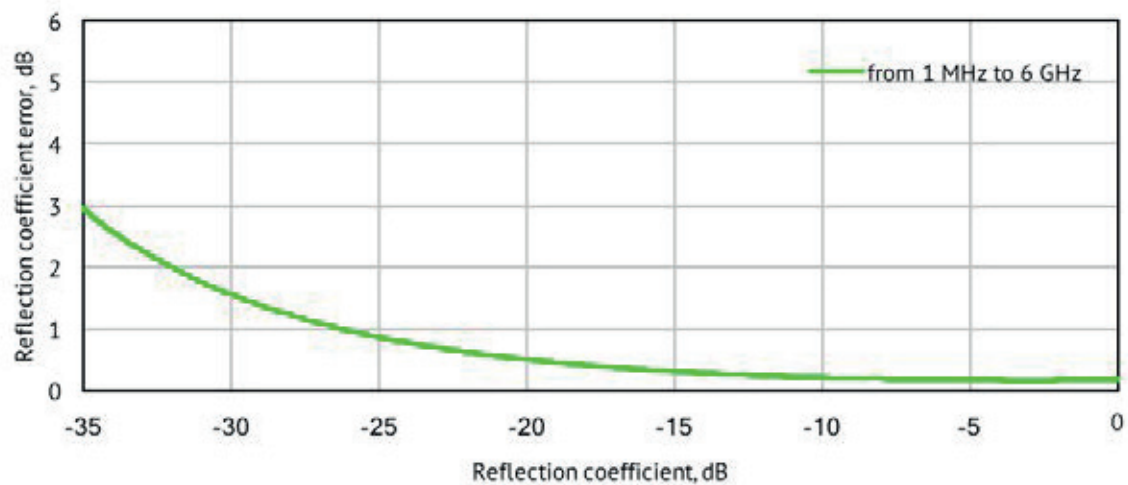

Specifications are based on isolating DUT ( $S_{21} = S_{12} = 0$ )

