

Technical Data Sheet

ML-10019 (ML-79 Series)



Description

- Broadband, multilayer absorber consisting of graduated layers of loaded open-cell urethane foam.
- Ideal for antenna cross-talk, sidelobe reduction, cavity resonance suppression, and far-field electromagnetic applications.
- Available with PSA, conductive film backing, and acrylic surface coating.
- Can be water-jet cut for custom configurations.
- RoHS and REACH compliant.


Physical Properties

<u>Properties</u>	<u>Value</u>
Temperature Range	-70°F to 270°F (-57°C to 132°C)
Thickness	4.50" (11.43 cm)
Standard Sheet Size	24" x 24" (60.96 cm x 60.96 cm) Other sheet sizes available upon request.
Color	Black

Electrical Properties

<u>Frequency</u>	<u>Typical Reflection Loss</u>
2-18 GHz	≤ -17 dB

Reflection Loss

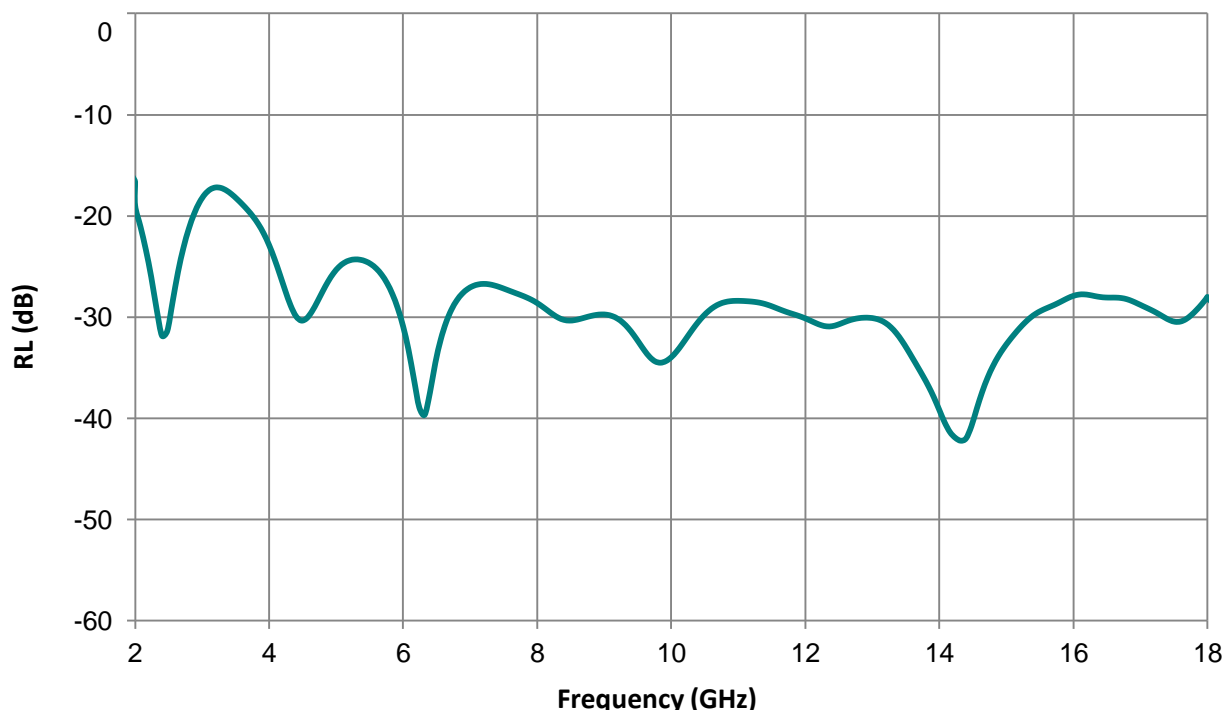

Note: the information provided above is accurate at time of publication. It is the responsibility of the end-user to confirm compliance to their application. All test data is typical.



Deutschland

Telemeter Electronic GmbH

Joseph-Gänsler-Str. 10, 86609 Donauwörth
Tel. +49 906 70693-0, Fax +49 906 70693-50
info@telemeter.de, www.telemeter.info

Schweiz

Telemeter Electronic GmbH

Romanshornestr. 117, 8280 Kreuzlingen
Tel. +41 71 6992020, Fax +41 71 6992024
info@telemeter.ch, www.telemeter.info

Tschechische Republik

Telemeter Electronic s.r.o.

České Vrbné 2364, 37011 České Budějovice
Tel. +420 38 5310637, Fax +420 38 5510124
info@telemeter.cz, www.telemeter.info