

# Data Sheet

## DS1000E-EDU, DS1000D-EDU Series Digital Oscilloscopes


DS1152E-EDU, DS1072E-EDU, DS1152D-EDU, DS1072D-EDU

### Product Overview

DS1000E-EDU, DS1000D-EDU series are kinds of economical digital oscilloscope with high-performance.

DS1000E-EDU series are designed with dual channels and one external trigger channel.

DS1000D-EDU series are designed with dual channels and one external trigger channel as well as 16 channels logic analyzer.

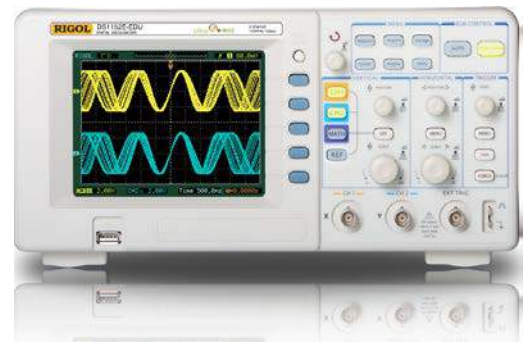

### Applications

- Electronic Circuit Test
- Circuit Functional Test
- Logical Relation Between Signals Verification
- Circuit of Mixed Signal Test
- Education & Training

### Main Features


- Dual analog channels and 16 channels logic analyzer, 150MHz maximum bandwidth, 1GSa/s maximum real-time Sample rate and 25GSa/s maximum equivalent Sample rate
- 5.6 inch and 64 k TFT LCD make the waveform displays more clear and vivid
- Abundant trigger types: Edge, Pulse Width, Video, Slope, Alternate, Pattern and Duration
- Unique adjustable trigger sensitivity enables to meet different demands
- Enable to measure 20 types of wave parameters and track measurements via cursor automatically
- Unique waveform record and replay

### Easy to Use Design

- Built-in help menu enables information getting more convenient
- Multiple Language User Interface, support Chinese & English input
- Support U disk and local files storage
- Waveform intensity can be adjusted
- To display a signal automatically by **AUTO**
- Pop-up menu makes it easy to read and use

- function
- Fine delayed scan function
- Built-in FFT function, hold practical digital filters
- Pass/Fail detection function enables to output testing results
- Math operations available to multiple waves
- Powerful PC application software UltraScope
- Standard configuration interface: USB Device, USB Host, RS-232 and support U disk storage and PictBridge print standards
- The new function "Key Lock" can meet the needs of industrial production
- Support for remote command control

## ➤ Automatically Measure 20 Wave Parameters




Automatic measure

The oscilloscopes provide 20 types of wave parameters for automatically measuring, which contains 10 Voltage and 10 Time parameters.


In cursor mode, users can easily measure by moving cursor. Besides, 3 types of cursor measurement are optional: Manual, Track and Auto.

## ➤ Cursor Measure



FFT cursor measure

## ➤ Multiple Trigger



Pattern trigger

The oscilloscopes contain abundant trigger modes: Edge trigger, Pulse width trigger, Video trigger, Slope trigger, Alternate trigger, Pattern trigger (only for DS1000D-EDU) and Duration trigger (only for DS1000D-EDU).


Especially the duration trigger is a new type from perfect combination of patten and pulse width trigger.

Unique function of adjustable trigger sensitivity is good for filtering possible noise from signal in order to avoid false triggers.

## ➤ 16 Channels Logic Analyzer

Being equipped with 16 channels logic analyzer, DS1000D-EDU series mixed signal oscilloscopes achieve mixed signal measure coordinating with 2 analog channels.


Each channel can be turned on or off independently, or in groups of 8(D7-D0 and D15-D8); also, you can set waveform size and threshold types or change the display position on screen for digital channel.



Digital channels setup

## ➤ Waveform Recording


In virtue of waveform recording function from the oscilloscope, not only the outputs from two channels could be recorded, but also the waves outputted by Pass/Fail test could be easily recorded. Totally, up to 1000 frames of waves are available to record. Besides, users can analyze waves according to reall or save transient waves so as to get more exact datum.




Waveform recording

## ➤ Pass/Fail Testing

The Pass/Fail function monitors the changes of signals by comparing whether the input signal is within the pre-defined mask. The testing results not only can be displayed on screen or output by isolated pass/fail port, but also can be alarmed according to turn on system sound.



Pass/Fail testing



Measurement window

## ➤ UltraScope Software

RIGOL provides powerful PC application software: UltraScope, which enables to: Capture and measure wave; Perform local or remote operation; Save waves as ".bmp" format; Save files as ".txt" or ".xls" format; Print waveforms.



Key Lock function

## ➤ Key Lock

This function is widely used in most productions. All keys are locked except F1 to F5 and MENU ON/OFF in this mode.

To lock the keyboard, use menu; to unlock, correct code has to be input. Also, you can reset a new code if necessary.

# Specifications

All specifications apply to DS1000E-EDU, DS1000D-EDU Series Oscilloscopes unless where noted. To come up to these specifications, two conditions must be met firstly:

- The instrument must have been operated continuously for 30 minutes under the specified operating temperature.
- Do perform Self-Calibration operation through the Utility menu if the range of operating temperature variations up to or more than 5°C.

**NOTE:** All specifications are guaranteed unless where marked "typical".

## Technical Specifications

Bandwidth				
DS1152E-EDU	DS1072E-EDU	DS1152D-EDU	DS1072D-EDU	
150MHz	70MHz	150MHz	70MHz	
Acquisition				
Sample Modes	Real-Time Sample	Equivalent Sample		
Sample Rate	1GSa/s, 200MSa/s <sup>[1]</sup>	DS1152X-EDU 25GSa/s	DS1072X-EDU 10GSa/s	
Averages	The waveform will be displayed one time while all the channels finish N times Sample, N could be selectable from 2, 4, 8, 16, 32, 64, 128 and 256			
Inputs				
Input Coupling	DC, AC, GND			
Input Impedance	1MΩ±2%, in parallel with 18pF±3pF			
Probe Attenuation Factors	1X, 5X, 10X, 50X, 100X, 500X,1000X			
Maximum Input Voltage	400V (DC+AC Peak, 1MΩ input impedance) 40V (DC+AC Peak) <sup>[1]</sup>			
Time Delay between Channel (typical)	500ps			
Horizontal				
Sample Rate Range	Real-Time: 13.65Sa/s-1GSa/s Equivalent: 13.65Sa/s-25GSa/s			
Waveform Interpolation	Sin(x)/x			
Record Length	Channel Mode	Sample rate	Memory Depth (normal)	Memory Depth (long memory)
	Single channel	1GSa/s	16kpts	N.A.
	Single channel	500MSa/s Or lower	16kpts	1Mpts
	Dual channel	500MSa/s Or lower	8kpts	512kpts
Scanning Speed Range (Sec/div)	2ns/div~50s/div, DS1152X-EDU 5ns/div~50s/div, DS1072X-EDU 1-2-5 Sequence			
Sample Rate and Delay Time Accuracy	±50ppm (any interval ≥1ms)			
Delta Time Measurement Accuracy (Full Bandwidth)	Single: ±(1 Sample interval + 50ppm × reading + 0.6 ns) >16 averages: ±(1Sample interval + 50ppm × reading + 0.4 ns)			
Vertical				
A/D Converter	8-bit resolution, all channels sample simultaneously <sup>[2]</sup>			
Volts/div Range	2mV/div~10V/div (at the input terminal connecting to BNC)			

Maximum Input	Maximum input voltage on analog channel CAT I 300Vrms, 1000Vpk; instantaneous overvoltage 1000Vpk CAT II 100Vrms, 1000Vpk	
Offset Range	±40V(250mV/div~10V/div) ±2V(2mV/div~245mV/div)	
Analog Bandwidth	150MHz (DS1152D-EDU, DS1152E-EDU) 70MHz (DS1072D-EDU, DS1072E-EDU)	
Single-shot Bandwidth	150MHz (DS1152D-EDU, DS1152E-EDU) 70MHz (DS1072D-EDU, DS1072E-EDU)	
Selectable Analog Bandwidth Limit (typical)	20MHz	
Lower Frequency Response (AC -3dB)	≤5Hz (at input BNC)	
Rise Time at BNC (typical)	<2.3ns, <5ns, respectively at 150MHz, 70MHz	
DC Gain Accuracy	2mV/div-5mV/div: ±4% (In Sample or Average acquisition mode) 10mV/div-10V/div: ±3% (In Sample or Average acquisition mode)	
DC Measurement Accuracy, Average Acquisition Mode	When vertical displacement is zero, and $N \geq 16$ : $\pm(\text{DC Gain Accuracy} \times \text{reading} + 0.1 \text{div} + 1 \text{mV})$ When vertical displacement is not zero, and $N \geq 16$ : $\pm[\text{DC Gain Accuracy} \times (\text{reading} + \text{vertical displacement}) + (1\% \text{ of vertical displacement}) + 0.2 \text{div}]$ When vertical scale is between 2mV/div and 245mV/div, add 2mV more for setting value. When vertical scale is between 250mV/div and 10V/div, add 50mV more for setting value.	
Delta Volts Measurement Accuracy (Average Acquisition Mode)	Under same setting and condition, the voltage difference ( $\Delta V$ ) between any two points in the waves coming from the average of more than 16 waves have been acquired: $\pm(\text{DC Gain Accuracy} \times \text{reading} + 0.05 \text{div})$	
<b>Trigger</b>		
Trigger Sensitivity	0.1div~1.0div (adjustable)	
Trigger Level Range	Internal	±6 divisions from center of screen
	EXT	±1.2V
Trigger Level Accuracy (typical) applicable for the signal of rising and falling time $\geq 20\text{ns}$	Internal	$\pm(0.3 \text{div} \times \text{V/div})(\pm 4 \text{ divisions from center of screen})$
	EXT	$\pm(6\% \text{ of setting} + 200 \text{ mV})$
Trigger Offset	In Normal mode: pre-trigger (memory depth/ 2*Sample rate), delayed trigger 1s	
	In Slow Scan mode: pre-trigger 6div, delayed trigger 6div	
Trigger Holdoff Range	500ns~1.5s	
Set Level to 50% (typical)	When input signal frequency $\geq 50\text{Hz}$	
<b>Edge Trigger</b>		
Edge trigger slope	Rising, Falling, Rising + Falling	
<b>Pulse Width Trigger</b>		
Trigger Condition	(>, <, =) Positive pulse width, (>, <, =) Negative pulse width	
Pulse Width Range	20ns ~10s	
<b>Video Trigger</b>		
Video Standard Line Frequency	Support for standard NTSC, PAL and SECAM broadcast systems. Line number range: 1~525 (NTSC) and 1~625 (PAL/SECAM)	
<b>Slope Trigger</b>		
Trigger Condition	(>, <, =) Positive slope, (>, <, =) Negative slope	

Time Setting	20ns~10s	
<b>Alternate Trigger</b>		
Trigger on CH1	Edge, Pulse Width, Video, Slope	
Trigger on CH2	Edge, Pulse Width, Video, Slope	
<b>Pattern Trigger<sup>[1]</sup></b>		
Pattern Type	D0~D15 select H, L, X, $\bar{f}$ , $\bar{v}$	
<b>Duration Trigger<sup>[1]</sup></b>		
Pattern Type	D0~D15 select H, L, X	
Qualifier	>, <, =	
Time Setting	20ns~10s	
<b>Measurements</b>		
Cursor	Manual	Voltage difference between cursors ( $\Delta V$ ) Time difference between cursors ( $\Delta T$ ) Reciprocal of $\Delta T$ in Hertz ( $1/\Delta T$ )
	Track	Voltage value for Y-axis waveform Time value for X-axis waveform
	Auto	Cursors are visible when measure automaticly
Auto Measure	Vpp, Vamp, Vmax, Vmin, Vtop, Vbase, Vavg, Vrms, Overshoot, Preshoot, Freq, Period, Rise Time, Fall Time, +Width, -Width, +Duty, -Duty, Delay1→2 $\bar{f}$ , Delay1→2 $\bar{v}$	

**Remarks:**

[1] For DS1000D-EDU Series;

[2] Only one channel is available when the Sample rate is 1GSa/s.

## General Specifications

<b>Display</b>		
Display Type	5.7inch. (145mm) diagonal TFT Liquid Crystal Display	
Display Resolution	320 horizontal ×RGB×234 vertical pixels	
Display Color	64K color	
Display Contrast (typical)	150:1	
Backlight Brightness (typical)	300 nit	
<b>Probe Compensator Output</b>		
Output Voltage (typical)	Approximately 3Vpp (peak to peak value)	
Frequency (typical)	1kHz	
<b>Power Supply</b>		
Supply Voltage	100 ~ 240VAC <sub>RMS</sub> , 45~440Hz, CAT II	
Power Consumption	Less than 50W	
Fuse	2A, T level, 250 V	
<b>Environmental</b>		
Ambient Temperature	Operating 10°C ~ 40°C	
	Non-operating -20°C ~ +60°C	
Cooling Method	forced cooling by fan	
Humidity	below +35°C: ≤90% relative humidity	
	+35°C ~ +40°C: ≤60% relative humidity	
Altitude	Operating at 3,000 m or below	
	Non-operating at 15,000 m or below	
<b>Mechanical</b>		
Dimensions	Width	303mm
	Height	154mm
	Depth	133mm
Weight	Without package	2.3kg
	Packaged	3.5kg
<b>IP Protection</b>		
IP2X		
<b>Calibration Interval</b>		
The recommended calibration interval is one year		

## Ordering Information

### Name of Product

**RIGOL** DS1000E-EDU, DS1000D-EDU series oscilloscopes

### Standard Accessories

- Two Passive Probes
- A Power Cord that fits the standard of destination country
- An USB Cable
- A Data Cable (DS1000D-EDU series)
- An Active Logic Probe (DS1000D-EDU series)
- 20 Logic Testing Nips (DS1000D-EDU series)
- 20 Logic Testing Cables (DS1000D-EDU series)
- An User's Guide

### Optional Accessories

- BNC Cable
- RS232 Cable
- USB-GPIB Adapter
- Soft Carrying Case

## Warranty

Thank you for choosing **RIGOL** products!

**RIGOL** Technologies, Inc. warrants that this product will be free from defects in materials and workmanship from the date of shipment. If a product proved defective within the respective period, **RIGOL** will provide repair or replacement as described in the complete warranty statement.

For the copy of complete warranty statement or maintenance, please contact with your nearest **RIGOL** sales and service office.

**RIGOL** do not provide any other warranty items except the one being provided by this summary and the warranty statement. The warranty items include but not being subjected to the hint guarantee items related to tradable characteristic and any particular purpose.

**RIGOL** will not take any responsibility in cases regarding to indirect, particular and ensuing damage.