

T3DSO700HD Data Sheet

Digital Oscilloscope

Debug with Confidence

70 MHz – 200 MHz

12-bit High Resolution



Tools for Improved Debugging

- | | |
|---|--|
| <ul style="list-style-type: none"> ● 12-bit ADC – combined with low noise front end provides excellent noise performance. | <ul style="list-style-type: none"> ✓ Get better insight on the signal being measured with minimal noise interference. |
| <ul style="list-style-type: none"> ● Long Capture – maximum record length of 100 Mpts/Ch. | <ul style="list-style-type: none"> ✓ Capture more time and show more waveform detail. |
| <ul style="list-style-type: none"> ● Math and Measure – 9 basic math functions plus FFT and 50+ automatic measurement parameters. | <ul style="list-style-type: none"> ✓ Extract results from waveforms and measurements. |
| <ul style="list-style-type: none"> ● Built-in web server – supports remote control over LAN port. | <ul style="list-style-type: none"> ✓ Save data for external analysis and screen images for reports. |
| <ul style="list-style-type: none"> ● History – record function, the maximum recorded waveform length is 80,000 frames. | <ul style="list-style-type: none"> ✓ Replay the changing waveform history. |
| <ul style="list-style-type: none"> ● Includes Bode Plot and Power Analysis applications as standard. | <ul style="list-style-type: none"> ✓ Common applications coverage as standard. |
| <ul style="list-style-type: none"> ● MSO – Optional 16 Channel Digital Analyzer Lead Set. | <ul style="list-style-type: none"> ✓ Add mixed signal debugging to your Oscilloscope. |

PRODUCT OVERVIEW

T3DSO704HD	4 Channel 70 MHz
T3DSO714HD	4 Channel 100 MHz
T3DSO724HD	4 Channel 200 MHz

Teledyne Test Tools T3DSO700HD Digital Oscilloscopes are available in bandwidths of 70 MHz, 100 MHz and 200 MHz, have maximum record length of 100 Mpts/ch, and display 4 analog channels + optional 16 digital channels mixed signal analysis ability.

The T3DSO700HD series employs the latest technology which features a maximum waveform capture rate of up to 120,000 wfm/s in normal mode and 500,000 wfm/s in Sequence mode, 256-level intensity grading display function plus a color temperature display mode. It also employs an innovative digital trigger system with high sensitivity and low jitter. The trigger system supports multiple powerful triggering modes including serial bus triggering. Tools such as History waveform recording, Search and Navigate functions, Mask Test, Bode Plot, and Power Analysis allow for extended waveform records

captured, stored, and analyzed. An impressive array of measurement and math capabilities, options for a 25 MHz arbitrary waveform generator, as well as serial decoding are also features of the T3DSO700HD.

The 7" display capacitive touch screen supports multi-touch gestures, with the addition of user-friendly UI design, can greatly improve the operation efficiency. It also supports mouse control, and remote web control over LAN.

Key Features



- 12-bit Analog-Digital Convertors with sample rate up to 2 GS/s
- Front ends with 70 μ Vrms noise floor @ 200 MHz bandwidth
- Four analog channels, up to 200 MHz bandwidth
- Waveform capture rate up to 120,000 wfm/s (normal mode), and 500,000 wfm/s (sequence mode)
- Supports 256-level intensity grading and color temperature display modes
- Up to 100 Mpts/ch record length
- Serial bus triggering and decoder, supports protocols I²C, SPI, UART, CAN, LIN
- MSO – Optional 16 Channel Digital Analyzer available
- History waveform record (History) function, the maximum recorded waveform length is 80,000 frames
- Automatic measurements on 50+ parameters, supports statistics with histogram, track, trend, Gating measurement, and measurements on Math, History and Ref
- 4 Math traces (2 Mpts FFT, Filter, addition, subtraction, multiplication, division, integration, differential, square root, etc.), supports formula editor
- High Speed hardware-based Mask Test function, with Mask Editor tool for creating user-defined masks
- Optional 25 MHz waveform generator
- Interfaces include: USB Host, USB Device (USBTMC), LAN (VXI-11/Telnet/Socket), Pass/Fail, Trigger Out
- Built-in web server supports remote control over the LAN port using a web browser. Supports SCPI remote control commands. Supports external mouse and keyboard.

Models and Key Specification


Model	T3DS0704HD	T3DS714HD	T3DS0724HD
Analog channels	4		
Bandwidth	70 MHz	100 MHz	200 MHz
Vertical resolution	12-bit		
Sample rate (Max.)	One channel mode: 2 GS/s, Two channel mode: 1 GS/s, Four channel mode: 500 MS/s		
Memory depth (Max.)	One channel mode: 50 Mpts/ch, Two channel mode: 25 Mpts/ch, Four channel mode: 10 Mpts/ch		One channel mode: 100 Mpts/ch, Two channel mode: 50 Mpts/ch, Four channel mode: 25 Mpts/ch
Waveform capture rate (Max.)	Normal mode: 80,000 wfm/s; Sequence mode: 500,000 wfm/s		Normal mode: 120,000 wfm/s; Sequence mode: 500,000 wfm/s
Trigger type	Edge, Slope, Pulse width, Window, Runt, Interval, Dropout, Pattern, Video, Qualified, Nth edge, Setup/hold time, Serial		
Serial trigger and decode	I ² C, SPI, UART, CAN, LIN		
Measurement	50+ parameters, statistics, histogram, trend, and track supported		
Math	4 traces 2 Mpts FFT, +, -, x, ÷, fdt, d/dt, √, Identity, Negation, Absolute, Sign, ex, 10x, ln, lg, Interpolation, MaxHold, MinHold, ERES, Average, Filter. Supports formula editor		
Data analysis	Search, Navigate, History, Mask Test, Counter, Bode plot and Power Analysis		
Digital channel (optional)	16-channel; maximum sample rate up to 1 GS/s; record length up to 10 Mpts		
USB AWG module (optional)	One channel, 25 MHz, sample rate of 125 MHz, wavelength of 16 kpts, isolated output		
I/O	USB 2.0 Host x2, USB 2.0 Device, 10M/100M LAN, Auxiliary output (TRIG OUT, PASS/FAIL), Digital Analyzer Input		
Probe	PB470 (x4)	PP510 (x4)	PP215 (x4)
Display	7" TFT-LCD with capacitive touch screen (1024*600)		

FUNCTIONS & CHARACTERISTICS


12-bit High Resolution

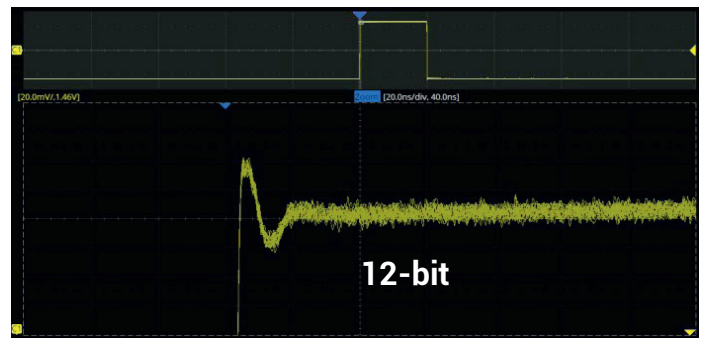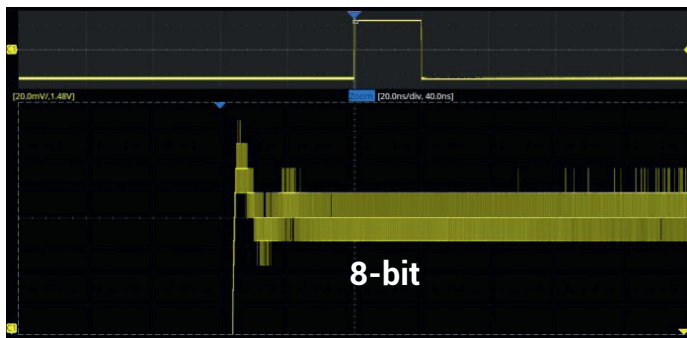

12-bit resolution shows you more details and less noise on the waveform

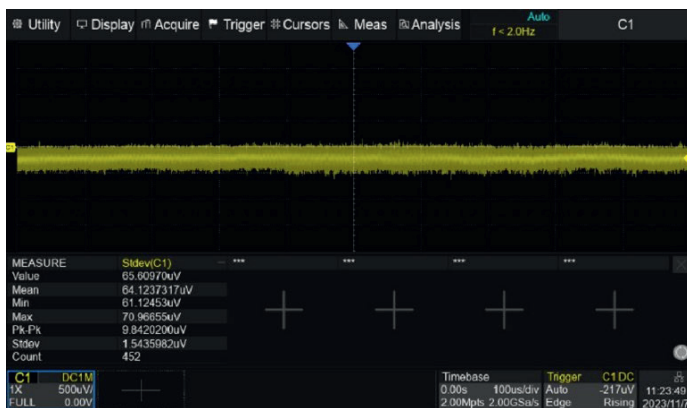

Low noise floor: Only 70 μ Vrms at 200 MHz bandwidth

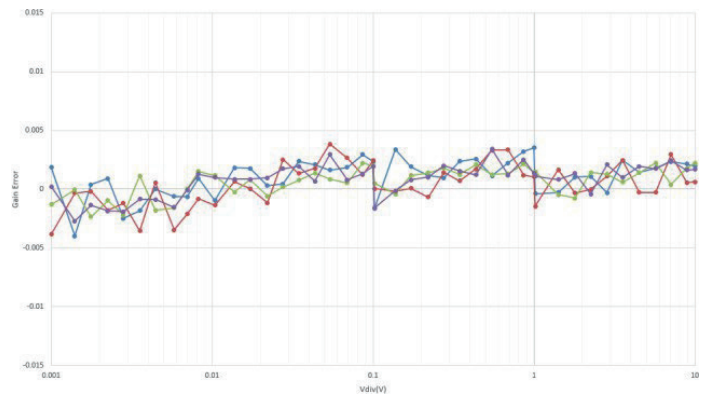


0.5 % DC gain accuracy


Excellent User Interface and User Experience

- 7" display with 1024 x 600 resolution
- Capacitive touch screen, supporting multi-touch gestures, can move or scale the waveform traces quickly by finger-touch movements, which greatly improves the operation efficiency
- Built-in WebServer supports remote control on a web page over LAN
- Supports external mouse and keyboard

Optional Font to Meet Different Observation Needs

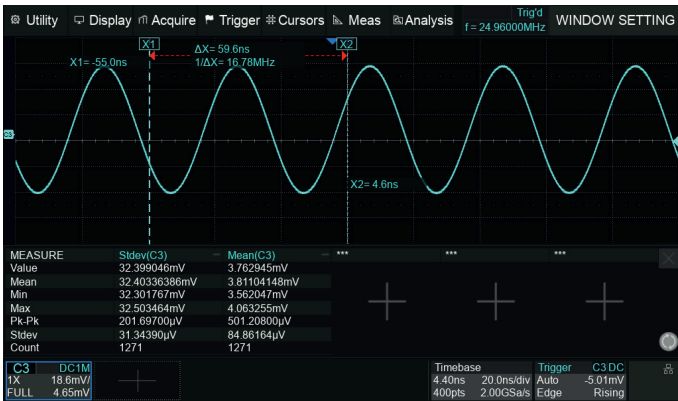


Large font size, suitable for use on devices.

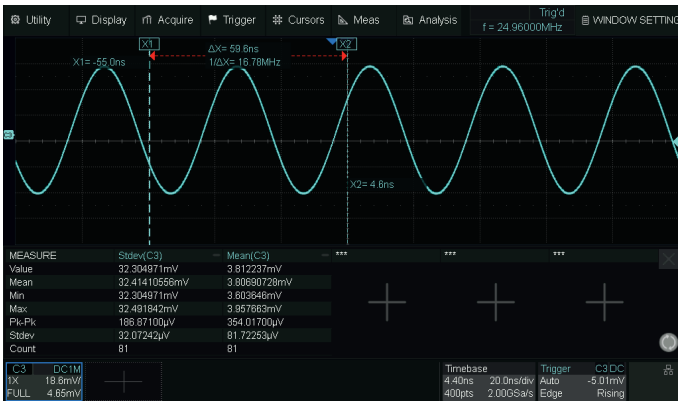


Small font size, exquisite display, suitable for large screen display scenarios such as VNC.

High Waveform Update Rate

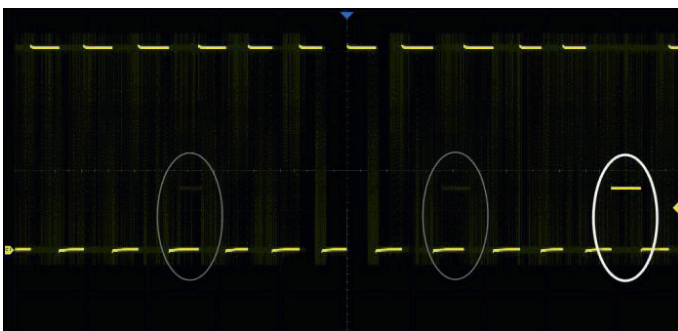


With a waveform update rate of up to 120,000 wfm/s, the oscilloscope can easily capture unusual or low-probability events. In Sequence mode, the waveform capture rate can reach 500,000 wfm/s.

Deep Record Length

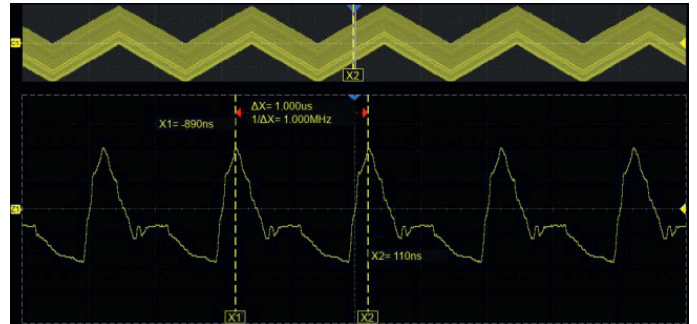

Using hardware-based Zoom technique and record length of up to 100 Mpts, users can select a slower time-base without compromising the sample rate, and then quickly zoom in to focus on the area of interest.


Multiple Trigger Functions

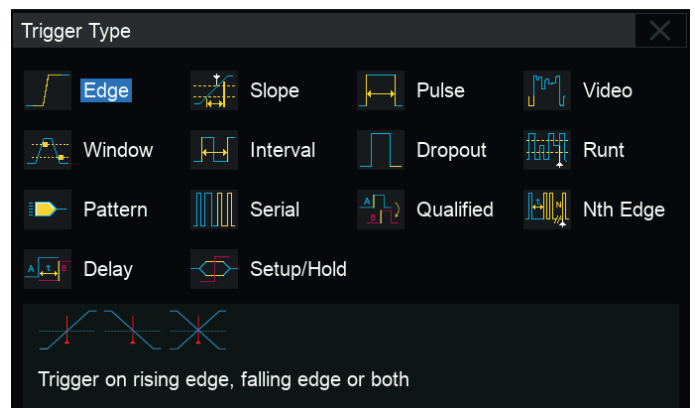


Edge, Slope, Pulse, Video, Windows, Runt, Interval, Dropout, Pattern, Qualified, Nth edge, Setup/hold, Delay, and serial trigger.

FUNCTIONS & CHARACTERISTICS

Advanced Math Functions

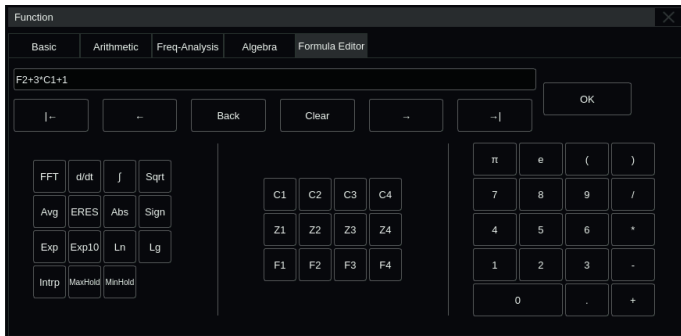

In addition to the traditional (+, -, X, /) operations, FFT, integration, differential, square root, and more are supported. Formula Editor is available for more complex operations. 4 math traces are available.

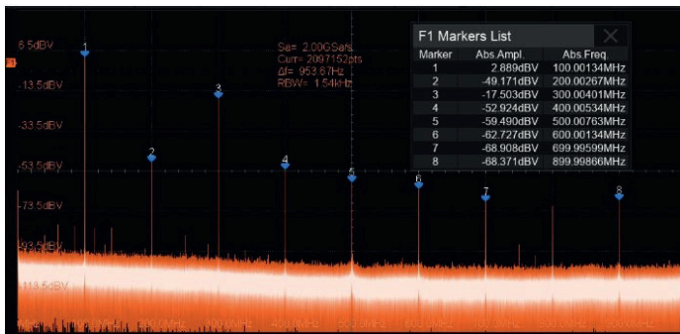


Hardware-accelerated FFT supports up to 2 Mpts operation. This provides high-frequency resolution with a fast refresh rate. The FFT function also supports a variety of window functions so that it can adapt to different spectrum measurement needs. Three modes (Normal, Average, and Max hold) can satisfy different requirements for observing the power spectrum. Auto peak detection and markers are supported.

Measurements of a Variety of Parameters



Parameter measurements include 4 categories: horizontal, vertical, miscellaneous, and CH delay providing a total of 50+ different types of measurements. Measurements can be performed within a specified gate period. Measurements on Math, Reference, and History frames are supported.

Parameter Statistics Function

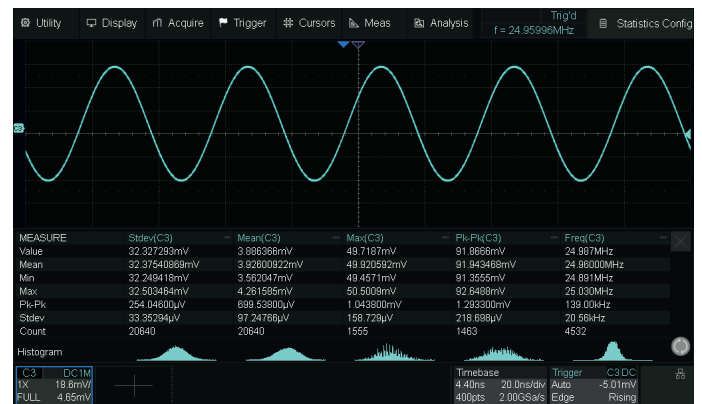

Statistics show the current value, maximum value, minimum value, standard deviation, and mean value. A histogram is available to show the probability distribution of a parameter. Trend and Track are available to show the parameter value vs. time.


For horizontal parameters such as period, all results are extracted from a frame, instead of just calculating the first one. This accelerates statistics on horizontal measurements much more and enables distribution observation in a frame using Histogram and Track.

History Mode




History function can record up to 80,000 frames of waveforms. The recording is executed automatically so that the customer can playback the history waveforms at any time to observe unusual events and quickly locate the area of interest using the cursors or measurements.

Search and Navigate

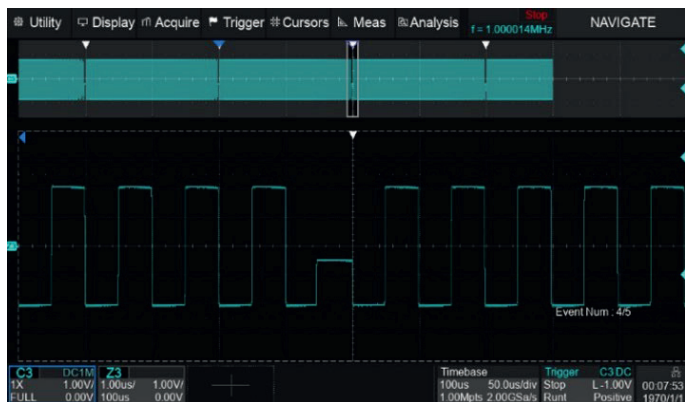


The oscilloscope can search events specified by the user in a frame. Events flagged by the Search can be recalled automatically using Navigate. It can also navigate by time (delay position) and history frames.

Sequence Mode

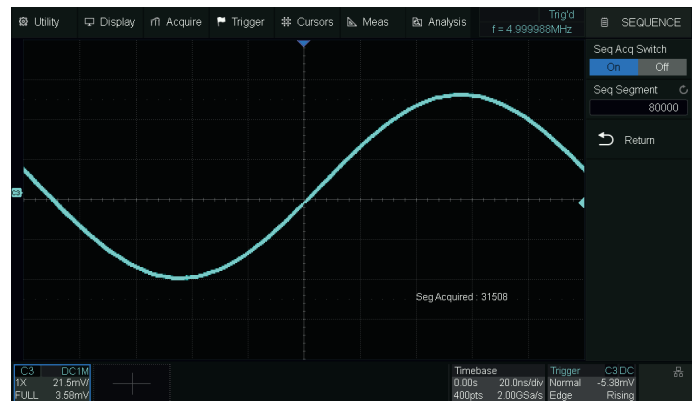

Segmented memory collection will store the waveform into multiple memory segments (up to 80,000) and each segment will store a triggered waveform as well the dead time information. The interval between segments can be as small as 2 μ s. All segments can be played back using the History function.


Serial Bus Decode

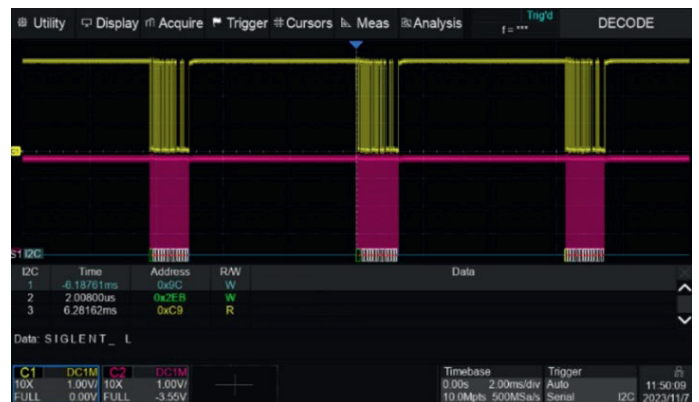

Display the decoded characters through the events list. Bus protocol information can be quickly and intuitively displayed in tabular form. I²C, SPI, UART, CAN, LIN are supported.

FUNCTIONS & CHARACTERISTICS

Hardware-based High Speed Mask Test Function

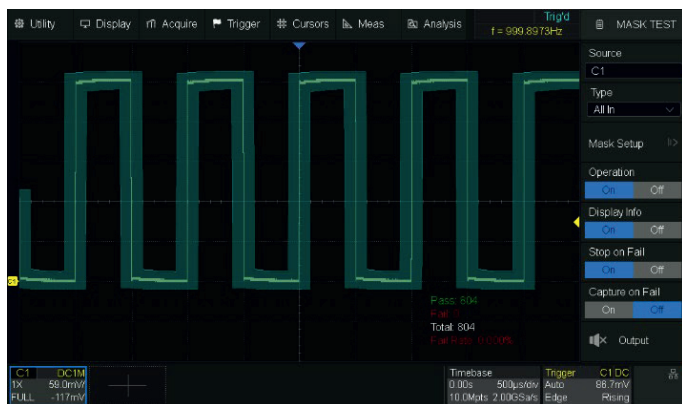


The oscilloscope utilizes a hardware-based Mask Test function, performing up to 80,000 Pass/Fail decisions each second. It is easy to generate user-defined test templates to provide trace mask comparisons, making it suitable for long-term signal monitoring or automated production line testing.



Built-in Mask Editor application helps to create custom masks.

Bode Plot

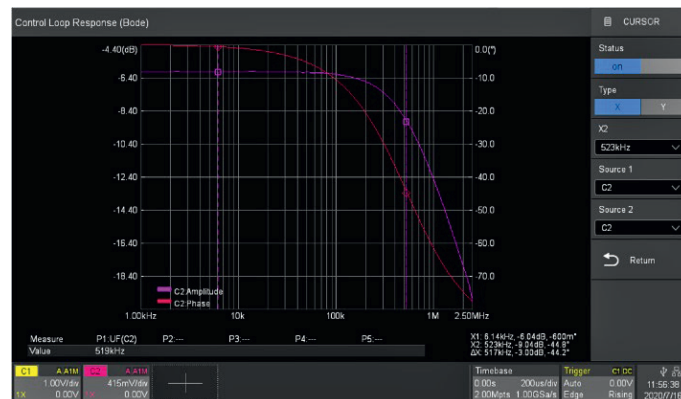


T3DS0700HD can control the USB AWG module, control an independent Teledyne Test Tools T3AFG scan a devices amplitude and phase frequency response, and display the data as a Bode Plot. There is also a Vari-level Mode for accurately measuring Power Supply Control Loop Response (PSRR).

Power Analysis




The Power Analysis option provides a full suite of power measurements and analysis, which greatly improve the measurement efficiency in switching power supplies and power devices design.

Digital Channels (optional)

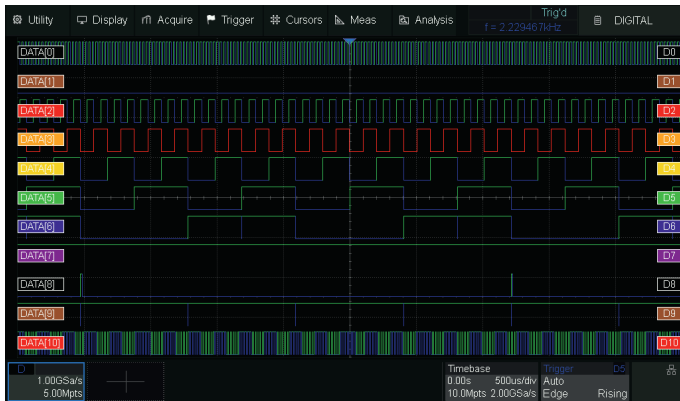

Four analog channels plus 16 digital channels enable users to acquire and trigger the waveforms then analyze the pattern, simultaneously with one instrument.

USB AWG module (optional)

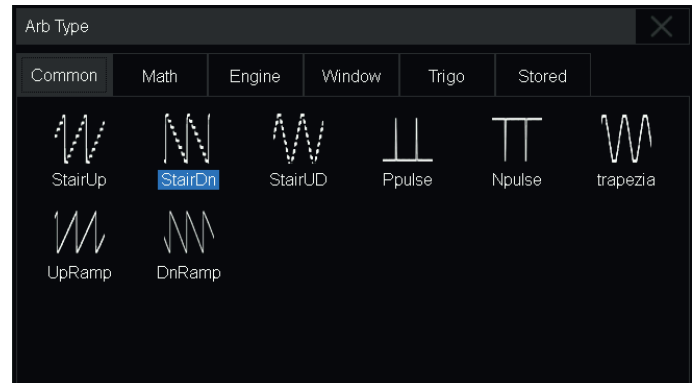

The USB waveform generator can output waveforms with up to 25 MHz frequency and ± 3 V amplitude. Six basic waveforms together with multiple types of predefined waveforms and as user-defined arbitrary waveforms are supported.

SPECIFICATIONS

All specifications are not guaranteed unless the following conditions are met:

- The oscilloscope calibration period is current
- The oscilloscope has been working continuously for at least 30 minutes at the specified temperature (18 °C ~ 28 °C)

Acquire (analog)

Sample rate	One channel mode: 2 GS/s, Two channel mode: 1 GS/s, Four channel mode: 500 MS/s	
Memory depth	70 MHz and 100 MHz Series: One channel mode: 50 Mpts/ch Two channel mode: 25 Mpts/ch Four channel mode: 10 Mpts/ch	200 MHz Series: One channel mode: 100 Mpts/ch Two channel mode: 50 Mpts/ch Four channel mode: 25 Mpts/ch
Waveform update rate	70 MHz and 100 MHz Series: Normal mode: up to 80,000 wfm/s Sequence mode: up to 500,000 wfm/s	200 MHz Series: Normal mode: up to 120,000 wfm/s Sequence mode: up to 500,000 wfm/s
Intensity grading	256-level	
Peak detect	2 ns	
Sequence	Up to 80,000 segments, interval between triggers = 2 μ s min.	
History	Up to 80,000 frames	
Interpolation	sinx/x, x	

SPECIFICATIONS

Model	T3DS0704HD	T3DS0714HD	T3DS0724HD
-------	------------	------------	------------

Vertical (analog)

Channel	4		
Bandwidth (-3 dB) @ 50 Ω	70 MHz	100 MHz	200 MHz
Flatness @ 50 Ω ¹⁾	DC – 10 % (BW): ±1 dB 10 % – 50 % (BW): ±2 dB 50 % – 100 % (BW): +2 dB / -3 dB		
Rise time @ 50 Ω (typical)	5 ns	3.5 ns	1.8 ns
Resolution	12-bit		
ENOB ²⁾ (typical)	8.4-bit		
Noise floor ³⁾ (rms, @ 50 Ω, typical, 1 mV/div)	70 µV (full bandwidth)		
Range	8 divisions		
Vertical scale (probe 1X)	1 MΩ: 0.5 mV/div – 10 V/div		
DC gain accuracy	0.5 mV/div ~ 4.95 mV/div: ±1.5 %; 5 mV/div ~ 10 V/div: ±0.5 % typical, ±1.0 % maximum		
Offset accuracy	± (0.5 % of the offset setting + 0.5 % of full scale + 1 mV)		
Offset range (probe 1X)	1 MΩ: 0.5 mV/div ~ 5 mV/div: ±1.6 V; 5.1 mV/div ~ 10 mV/div: ±4 V; 10.2 mV/div ~ 100 mV/div: ±8 V; 102 mV/div ~ 1 V/div: ±80 V; 1.02 V/div ~ 10 V/div: ±400 V		
Bandwidth limit	Hardware Bandwidth limit: 20 MHz, 200 MHz		
Low frequency response (AC coupling -3 dB)	2 Hz (typical)		
Overshoot (150 ps edge @ 50 Ω, typical)	10 %		
Coupling	DC, AC, GND		
Impedance	1 MΩ: (1 MΩ ±2 %) (17 pF ±2 pF)		
Max. input voltage	1 MΩ ≤ 400 Vpk (DC + AC), DC ~ 10 kHz		
SFDR	≥ 35 dBc		
CH to CH Isolation (@ 50 Ω)	DC ~ Max BW: > 40 dB		
Probe Attenuation	1X, 10X, 100X, custom		

Horizontal

Time scale	2 ns/div ~ 1000 s/div	1 ns/div ~ 1000 s/div
Range	10 divisions	
Display mode	Y-T, X-Y, Roll	
Roll mode	≥ 50 ms/div	
Skew (CH1 ~ CH4)	< 100 ps	
Time base Accuracy	±2 ppm	

¹⁾ T3DS0700HD has no internal 50 Ω.

²⁾ 24.99 MHz input, -0.25 dBFS, 20 mV/div, 50 Ω input impedance

³⁾ Use the "Stdev" measurement

Trigger

Mode	Auto, Normal, Single
Level	Internal: ± 4.1 div from the center of the screen
Hold off range	By time: 8 ns ~ 30 s (8 ns step)
Coupling	AC DC LFRJ HFRJ Noise RJ
Coupling frequency response (CH1 ~ CH4)	DC: Passes all components of the signal AC: Blocks DC components and attenuates signals below 8Hz LFRJ: Blocks the DC component and attenuates the low-frequency components below 2 MHz HFRJ: Attenuates the high-frequency components above 2.4 MHz
Accuracy (typical)	CH1 ~ CH4: ± 0.2 div
Sensitivity	CH1 ~ CH4: DC ~ Max BW: 0.6 div
Jitter	CH1 ~ CH4: < 100 ps
Displacement	Pre-Trigger: 0 ~ 100 % memory Delay-Trigger: 0 ~ 10,000 div
Edge Trigger	
Source	CH1 ~ CH4 / AC Line / D0 ~ D15
Slope	Rising, Falling, Alternating
Slope Trigger	
Source	CH1 ~ CH4
Slope	Rising, Falling
Limit range	<, >, in range, out of range
Time range	2 ns ~ 20 s, Resolution = 1 ns
Pulse Width Trigger	
Source	CH1 ~ CH4 / D0 ~ D15
Polarity	+width, -width
Limit range	<, >, in range, out of range
Time range	2 ns ~ 20 s, Resolution = 1 ns
Video Trigger	
Source	CH1 ~ CH4
Standard	NTSC, PAL, 720p/50, 720p/60, 1080p/50, 1080p/60, 1080i/50, 1080i/60, Custom
Synchronization	Any, Select
Trigger condition	Line, Field
Window Trigger	
Source	CH1 ~ CH4
Window type	Absolute, Relative
Interval Trigger	
Source	CH1 ~ CH4 / D0 ~ D15
Slope	Rising, Falling
Limit range	<, >, in range, out of range
Time range	2 ns ~ 20 s, Resolution = 1 ns

SPECIFICATIONS

Dropout Trigger

Source	CH1 ~ CH4 / D0 ~ D15
Timeout type	Edge, State
Slope	Rising, Falling
Time range	2 ns ~ 20 s, Resolution = 1 ns

Runt Trigger

Source	CH1 ~ CH4
Polarity	Positive, Negative
Limit range	<, >, in range, out of range
Time range	2 ns ~ 20 s, Resolution = 1 ns

Pattern Trigger

Source	CH1 ~ CH4 / D0 ~ D15
Pattern setting	Don't Care, Low, High
Logic	AND, OR, NAND, NOR
Limit range	<, >, in range, out of range
Time range	2 ns ~ 20 s, Resolution = 1 ns

Qualified Trigger

Type	State, State with Delay, Edge, Edge with Delay
Qualified source	CH1 ~ CH4
Edge source	CH1 ~ CH4
Qualify state	Low, High
Qualify edge	Rising, Falling
Limit range	<, >, in range, out of range
Time range	2 ns ~ 20 s, Resolution = 1 ns

Nth Edge Trigger

Source	CH1 ~ CH4
Slope	Rising, Falling
Idle time	8 ns ~ 20 s, Resolution = 1 ns
Edge Number	1 ~ 65535

Delay Trigger

Source A	CH1 ~ CH4
Source B	CH1 ~ CH4
Slope	Rising, Falling
Limit range	<, >, in range, out of range
Time range	2 ns ~ 20 s, Resolution = 1 ns

Setup/Hold Trigger

Option	Setup, Hold
CLK source	CH1 ~ CH4
CLK slope	Rising, Falling
Data source	CH1 ~ CH4
Data state	Low, High
Limit range	<, >, in range, out of range
Time range	2 ns ~ 20 s, Resolution = 1 ns

Serial Trigger

Source	CH1 ~ CH4 / D0 ~ D15
Protocol	I ² C, SPI, UART, CAN, LIN
I ² C	Type: Start, Stop, Restart, No Ack, EEPROM, Address & Data, Data Length
SPI	Type: Data
UART	Type: Start, Stop, Data, Parity Error
CAN	Type: All, Remote, ID, ID+Data, Error
LIN	Type: Break, Frame ID, ID+Data, Error

Serial Decoder

Decoders	2
Threshold	-4.5 ~ 4.5 div
List	1 ~ 7 lines
Decoder type	Full duplex

I²C

Source	CH1 ~ CH4 / D0 ~ D15
Signal	SCL, SDA
Address	7-bit, 10-bit

SPI

Source	CH1 ~ CH4 / D0 ~ D15
Signal	CLK, MISO, MOSI, CS
Edge Select	Rising, Falling
Chip select	Active high, Active low, Clock timeout
Bit order	LSB, MSB

UART

Source	CH1 ~ CH4 / D0 ~ D15
Signal	RX, TX
Data width	5-bit, 6-bit, 7-bit, 8-bit
Parity check	None, Odd, Even, Mark, Space
Stop bit	1-bit, 1.5-bit, 2-bit
Idle level	Low, High
Bit order	LSB, MSB

CAN

Source	CH1 ~ CH4 / D0 ~ D15
--------	----------------------

LIN

LIN version	Ver 1.3, Ver 2.0
Source	CH1 ~ CH4 / D0 ~ D15
Baud rate	600 bps, 1200 bps, 2400 bps, 4800 bps, 9600 bps, 19200 bps, Custom

SPECIFICATIONS

Measurement

Automatic Measurement

Source	CH1 ~ CH4, D0 ~ D15, Z1 ~ Z4, F1 ~ F4, Ref, History
Mode	Simple, Advanced
Range	Screen Gated: inside screen, definable with separate Gate cursors
Custom threshold	Upper, Middle, Lower
Vertical parameters	Max, Min, Pk-Pk, Top, Base, Amplitude, Mean, Cycle Mean, Stdev, Cycle Stdev, RMS, Cycle RMS, Median, Cycle Median, FOV, FPRE, ROV, RPRE, Level@Trigger
Horizontal parameters	Period, Frequency, Time@max, Time@min, +Width, -Width, 10–90 % Rise time, 90–10 % Fall time, Rise time, Fall time, +Burst Width, -Burst Width, +Duty Cycle, -Duty Cycle, Delay, Time@Middle, Cycle-Cycle jitter
Miscellaneous parameters	+Area@DC, -Area@DC, Area@DC, Absolute Area@DC, +Area@AC, -Area@AC, Area@AC, Absolute Area@AC, Cycles, Rising Edges, Falling Edges, Edges, Positive pulses, Negative pulses, Positive Slope, Negative Slope
Delay parameters	Phase, FRFR, FRFF, FFFR, FFFF, FRLR, FRLF, FFLR, FFLF, Skew, Tsu@R, Tsu@F, Th@R, Th@F
Statistics	Current, Mean, Min, Max, Pk-Pk, Sdev, Count, Histogram, Trend, Track
Statistics count	Unlimited, 1 ~ 1024

Cursors

Source	CH1 ~ CH4, D0 ~ D15, F1 ~ F4, Ref
Type	Manual: Time X1, X2, (X1-X2), (1/ΔT); Vertical Y1, Y2, (Y1-Y2) Track: Time X1, X2, (X1-X2) Measure: indicates the measurement on specific parameter

Math

Trace	F1~F4
Source	C1~C4, Z1~Z4, F1~F4,
Operation	FFT, +, -, x, ÷, ∫dt, d/dt, √, Identity, Negation, x , Sign, ex, 10x, ln, lg, Interpolation, Max hold, Min hold, ERES, Average, Filter, Formula Editor
FFT	Length: 2 Mpts, 1 Mpts, 512 kpts, 256 kpts, 128 kpts, 64 kpts, 32 kpts, 16 kpts, 8 kpts, 4 kpts, 2 kpts, 1 kpts Window: Rectangle, Blackman, Hanning, Hamming, Flatop Display: Full Screen, Split, Exclusive Mode: Normal, Max hold, Average
	Tools: Peaks, Markers

Analysis

Search

Source	C1~C4, History
Mode	Edge, Slope, Pulse, Interval, Runt
Copy setting	Copy from trigger, Copy to trigger

Navigate

Type	Search event, Time, History frame
------	-----------------------------------

Mask Test

Source	C1~C4, Z1~Z4
Mask creating	Auto (Create mask), Customized (Mask Editor)
Mask test speed	Up to 80,000 frames/s

Bode Plot

Source	C1~C4
Supported signal sources	AWG Module (Connection: USB), T3AFG series waveform generators (Connection: USB, LAN)
Sweep type	Simple, Vari-level
Frequency	Mode: Linear, Logarithmic Range: 10 Hz ~ 120 MHz
Measure	Upper cutoff frequency, Lower cutoff frequency, Bandwidth, Gain margin, Phase margin

Power Analysis

Measure	Power quality, Current Harmonics, Inrush current, Switching loss, Slew rate, Modulation, Output ripple, Turn on/turn off, Transient response, PSRR, Efficiency, SOA
---------	---

Counter

Source	C1~C4
Frequency resolution	7 digits
Totalizer	Counter on edges, supports Gate and Trigger

Digital Channels (optional)

Max. Sampling Rate	1 GS/s
Memory Depth	10 Mpts/ch
Min. Detectable Pulse Width	3.3 ns
Level Group	D0~D7, D8~D15
Level Range	-10 V~10 V
Logic Type	TTL, CMOS, LVCMOS3.3, LVCMOS2.5, Custom
Skew	D0 ~ D15: ± 1 sampling interval Analog to Digital (Triggered On Digital): $\pm (1 \text{ sampling interval} + 1 \text{ ns})$ Digital to Analog (Triggered On Analog): $\pm 4 \text{ ns}$

SPECIFICATIONS

USB AWG Module (optional)

Channels	1
Max. Output Frequency	25 MHz
Sampling Rate	125 MS/s
Frequency Resolution	1 μ Hz
Frequency Accuracy	± 50 ppm
Vertical Resolution	14 bit
Amplitude Range	-1.5 V ~ +1.5 V (into 50 Ω) -3 V ~ +3 V (into High-Z)
Waveforms	Sine, Square, Ramp, Pulse, DC, Noise, 45 Arbitrary
Output Impedance	50 $\Omega \pm 2\%$
Protection	Over voltage protection, Current limit
Isolated voltage	± 42 Vpk

Sine

Frequency	1 μ Hz ~ 25 MHz
Offset accuracy (10 kHz)	$\pm (1\% \cdot \text{offset setting value} + 3 \text{ mVpp})$
Amplitude flatness	± 0.3 dB, compare to 10 kHz, 2.5 Vpp into 50 Ω
SFDR	DC ~ 1 MHz -60 dBc 1 MHz ~ 5 MHz -55 dBc 5 MHz ~ 25 MHz -50 dBc
Harmonic distortion	DC ~ 5 MHz -50 dBc 5 MHz ~ 25 MHz -45 dBc

Square/Pulse

Frequency	1 μ Hz ~ 10 MHz
Duty cycle	1 % ~ 99 %
Edge	< 24 ns (10 % ~ 90 %)
Overshoot	< 3 % (typical ~ 1 kHz, 1 Vpp)
Pulse width	> 50 ns
Jitter (cycle-cycle)	< 500 ps + 10 ppm

Ramp

Frequency	1 μ Hz ~ 300 kHz
Linearity	< 0.1 % of Pk-Pk (typical, 1 kHz, 1 Vpp, 50 % symmetry)
Channels	0 % ~ 100 %

DC

Offset range	± 1.5 V (into 50 Ω) ± 3 V (into Hi-Z)
Accuracy	$\pm (\text{setting value} \cdot 1\% + 3 \text{ mV})$

Noise

Bandwidth (-3 dB)	> 25 MHz
-------------------	----------

Arbitrary Wave

Frequency	1 μ Hz ~ 5 MHz
Waveform memory	16 kpts
Sample rate	125 MS/s
Wave import	From EasyWaveX, from U-disk, directly from waveform data of analog channels

I/O

Front	USB 2.0 Host, Digital Input, Calibration Signal: 1 kHz, 3 V Square
Rear	USB 2.0 Host, USB 2.0 Device, LAN: 10/100MbaseT (RJ45), Auxiliary Output: TRIG OUT (3.3 V LVCMOS), PASS/FAIL OUT (3.3 V TTL)

Display

Display Type	7" TFT LCD with capacitive touch screen
Resolution	1024 × 600
Contrast (typical)	500:1
Backlight (typical)	500 nit

Display Setting

Range	8 × 10 grid
Display type	Dot, Vector
Persistence time	OFF, 1 s, 5 s, 10 s, 30 s, infinite
Color display	Normal, Color
Language	Simplified Chinese, Traditional Chinese, English, French, Japanese, German, Spanish, Russian, Italian, Portuguese
Built-in help system	Simplified Chinese, English

Environmental

Temperature	Operating: 0 °C ~ 40 °C Non-operating: -30 °C ~ 70 °C		
Humidity	Operating: 5 % ~ 90 % RH, 30 °C, derated to 50 % RH at 40 °C Non-operating: 5 % ~ 95 %		
Altitude	Operating: ≤ 3,000 m, 25 °C Non-operating: ≤ 15,000 m		
Electromagnetic Compatibility	Meets EMC directive (2014/30/EU), meets or exceeds EN IEC 61326-1:2021, EN IEC 61326-2-1:2021 (Basic)		
	Conducted disturbance	CISPR 11/EN 55011	CLASS A group 1 150 kHz – 30 MHz
	Radiated disturbance	CISPR 11/EN 55011	CLASS A group 1 30 MHz – 1 GHz
	Electrostatic discharge (ESD)	IEC 61000-4-2/EN 61000-4-2	4.0 kV (Contact), 8.0 kV (Air)
	Radio-frequency electromagnetic field Immunity	IEC 61000-4-3/EN 61000-4-3	10 V/m (80 MHz to 1 GHz) 3 V/m (1.4 GHz to 2 GHz); 1 V/m (2.0 GHz to 2.7 GHz)
	Electrical fast transients (EFT)	IEC 61000-4-4/EN 61000-4-4	2 kV (Input AC Power Ports)
	Surges	IEC 61000-4-5/EN 61000-4-5	1 kV (Line to line) 2 kV (Line to ground)
	Radio-frequency continuous conducted Immunity	IEC 61000-4-6/EN 61000-4-6	3 V, 0.15 – 80 MHz
	Voltage dips and interruptions	IEC 61000-4-11/EN 61000-4-11	Voltage Dips: 0 % UT during 1 cycle; 40 % UT during 10/12 cycles; 70 % UT during 25/30 cycles Voltage interruptions: 0 % UT during 250/300 cycles
Safety	TUV Certified. Conforms to: UL 61010-1:2012/R: 2018-11; UL 61010-2-030:2018 CAN/CSA-C22.2 No. 61010-1:2012/A1:2018-11; CAN/CSA-C22.2 No. 61010-2-030:2018 Meets Low Voltage Directive (2014/35/EU). Conforms to: EN 61010-1:2010+A1:2019; EN IEC 61010-2-030:2021		
RoHS	EU 2015/863		

SPECIFICATIONS

Power Supply

Input voltage & frequency	100 ~ 240 Vrms 50/60 Hz
Power consumption	80 W max., 40 W typical, 4 W typical in standby mode

Mechanical

Dimensions	Length × Height × Width = 312 mm × 151 mm × 132.6 mm (including knobs and supporting legs)
Weight	Net Weight 2.6 kg, Gross Weight 3.8 kg

All T3DS0700HD Series Oscilloscopes come with a 3 year Teledyne LeCroy warranty.

T3DS0700HD Series Probes and Accessories

Probe type	Model	Picture	Description
Passive	T3PP350		350 MHz bandwidth, 10 MΩ, 10X Passive Probe. Replacement probe for the T3DS0700HD series.
Logic Probe	T3-DALS-16		16 Channel Digital Analyzer Lead Set.
USB AWG Module	T3DS0-FGMOD		Output Sine, Square, Ramp, pulse, Noise, DC and 45 built-in waveforms. The arbitrary waveforms can be accessed and edited by the EasyScope PC software

ORDERING INFORMATION

Ordering information

Description	12-bit, 70 MHz, 2 GS/s, 4-CH, 50 Mpts/ch memory depth, 7" capacitive touch screen	T3DSO704HD
	12-bit, 100 MHz, 2 GS/s, 4-CH, 50 Mpts/ch memory depth, 7" capacitive touch screen	T3DSO714HD
	12-bit, 200 MHz, 2 GS/s, 4-CH, 100 Mpts/ch memory depth, 7" capacitive touch screen	T3DSO724HD
Standard Accessories	Passive Probe x 4	
	USB Cable	
	Power Cord	
	Quick Start Guide	
	Certificate of Calibration	
Optional Accessories	16 Channel Digital Analyzer Lead Set	T3-DALS-16
	350 MHz Passive Probe, 10:1, 10 MΩ	T3PP350
	USB AWG Module	T3DSO- FGMOD