


Thermoelectric Cooler Performance Specifications

TES1-007030-8X8S-W150





Hot Side Temperature(°C)	27 °C	50 °C
Qmax (Watts)	1.4	1.6
Delta Tmax(°C)	68	75
I _{max} (Amps)	3	3
V _{max} (Volts)	0.9	0.92
Module Resistance(Ohms)	0.25	0.28

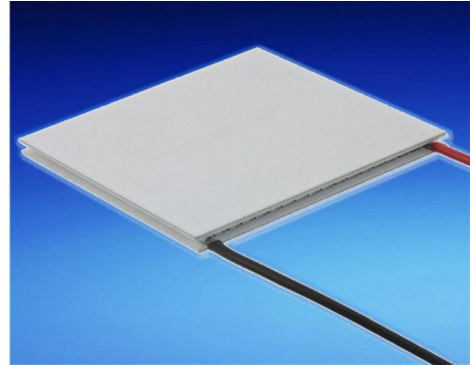


**Tolerances for thermal and electrical parameters ± 10%.

Performance Curves Th=27 °C

Performance Curves Th=50 °C

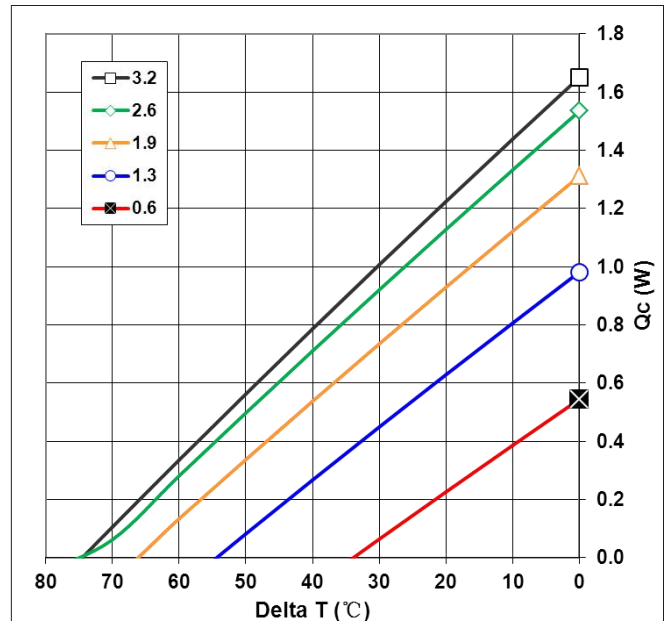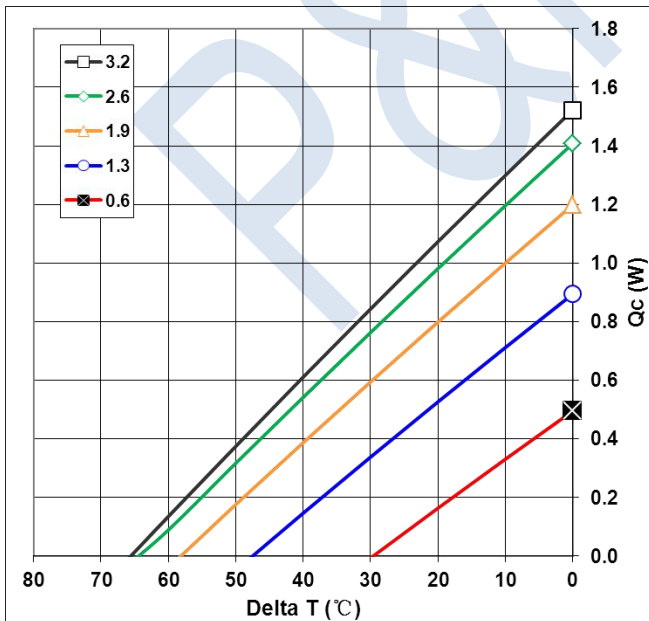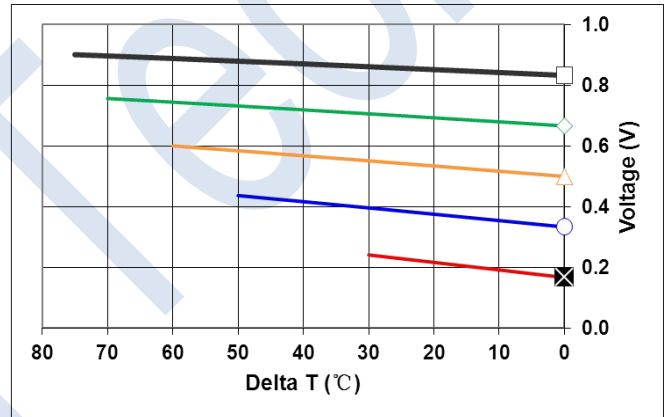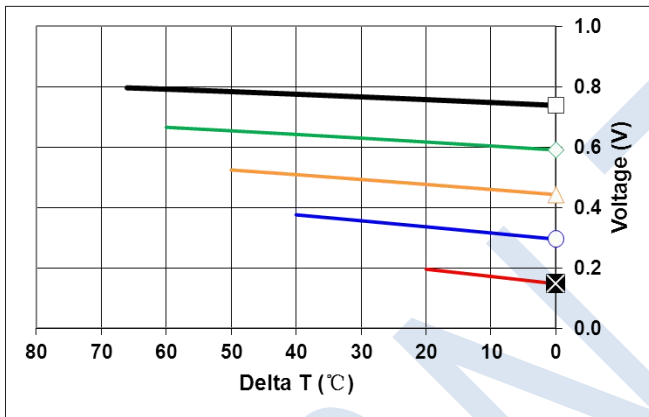

Mechanical Drawing:

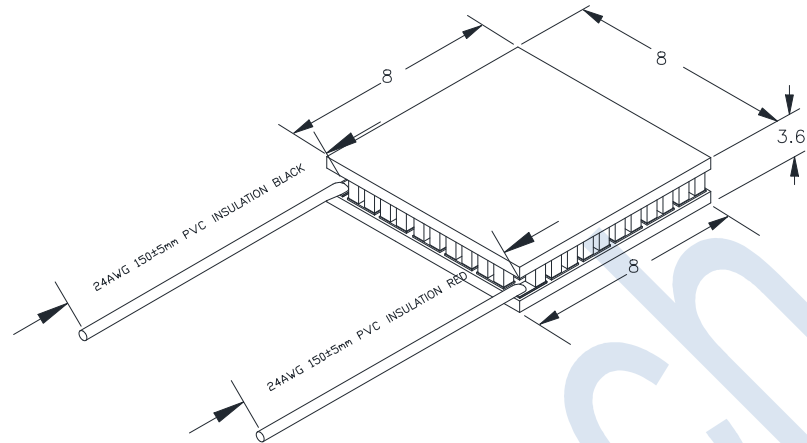

Module is sealant by RTV sealant.

Operation Tips:

- Max Operating Temperature: **90°C**.
- Do not exceed I_{max} or V_{max} when operating module.
- Please consult P&N Technology for moisture and corrosion protection options.

Address: 5/F Xinfei Building 28th Xiangming Road, Torch (xiang'an) Hi-tech Zone, Xiamen Fujian China.

Sales Tel: + 86 - 592 - 352 1988

Fax: +86-592-352 1989

Postcode: 361 101

Web: www.pengnantech.com