


Thermoelectric Cooler Performance Specifications

热电模块性能规格书

TES1-127040-30X30 W150mm





Hot Side Temperature(°C)热面温度(°C)	25 °C	50 °C
Qmax (Watts)最大制冷量(w)	33.4	37.0
Delta Tmax(°C)最大温度差(°C)	68	75
I _{max} (Amps)最大输入电流 (A)	3.9	3.9
V _{max} (Volts)最大输入电压 (V)	15.4	16.3
ModuleResistance(Ohms)电阻值 (Ω)	3.4	3.8

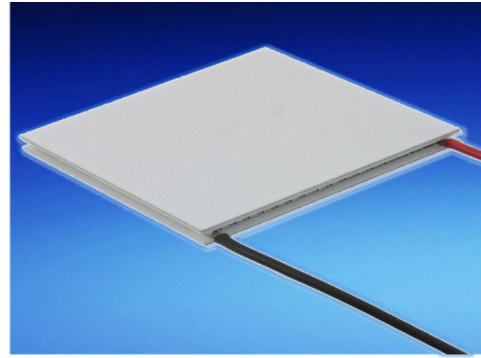


**Tolerances for thermal and electrical parameters ± 10%.
 热电参数的公差 ±10%

Performance Curves Th=25 °C (性能曲线 Th=25°C)

Performance Curves Th=50 °C (性能曲线 Th=50°C)

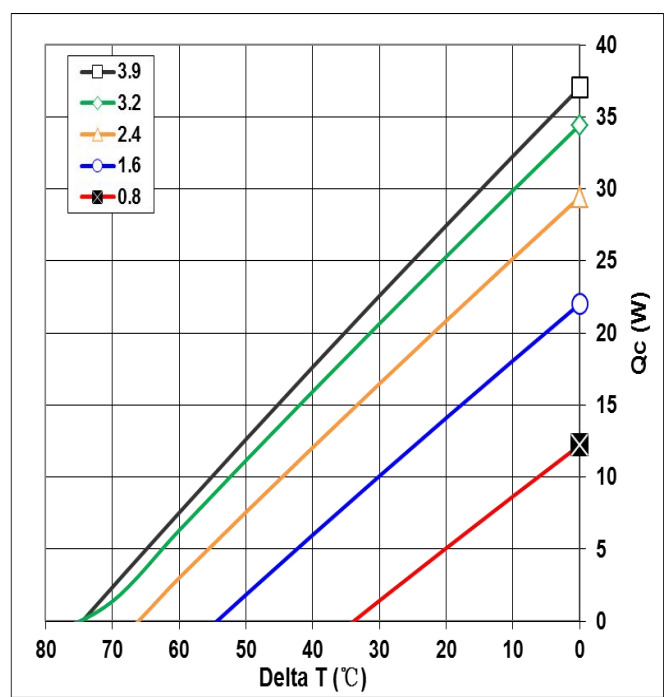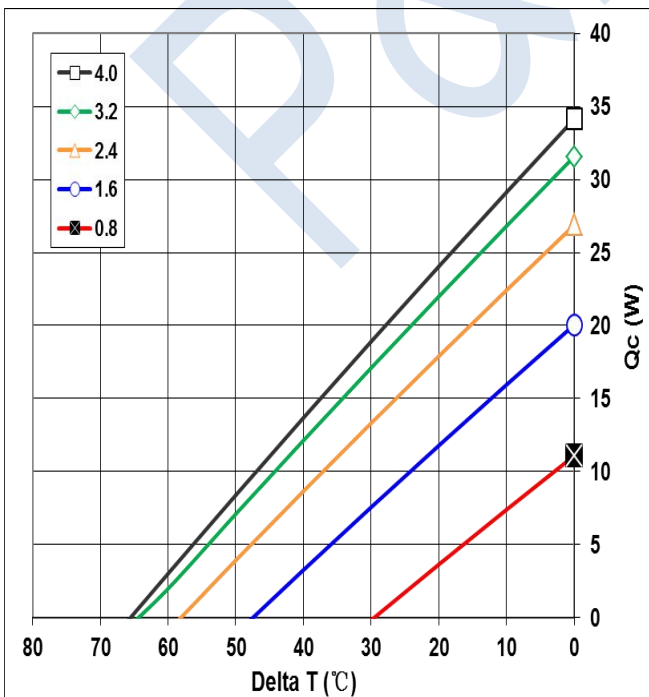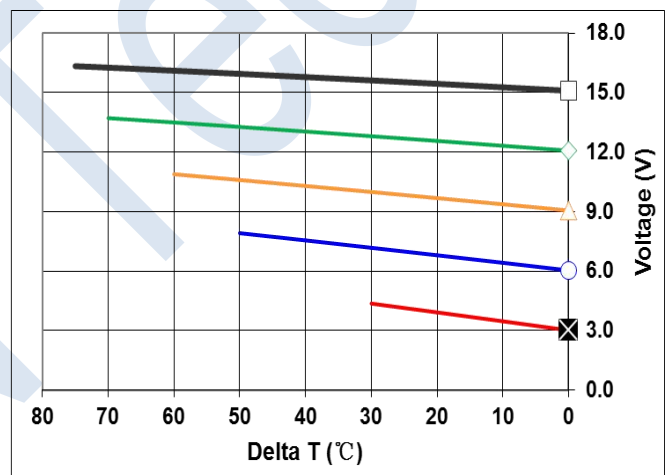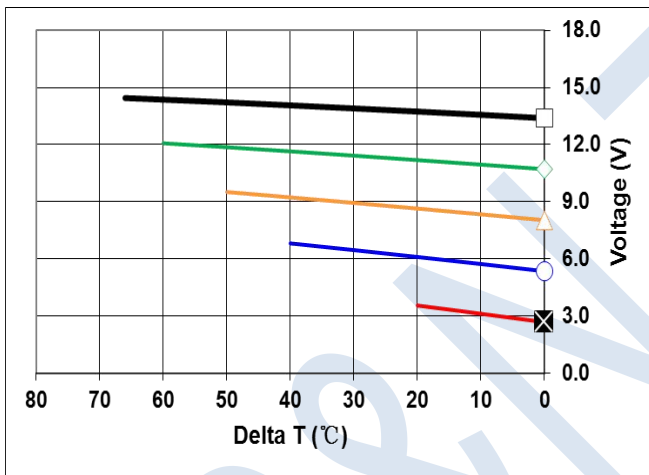

Mechanical Drawing (示意图):

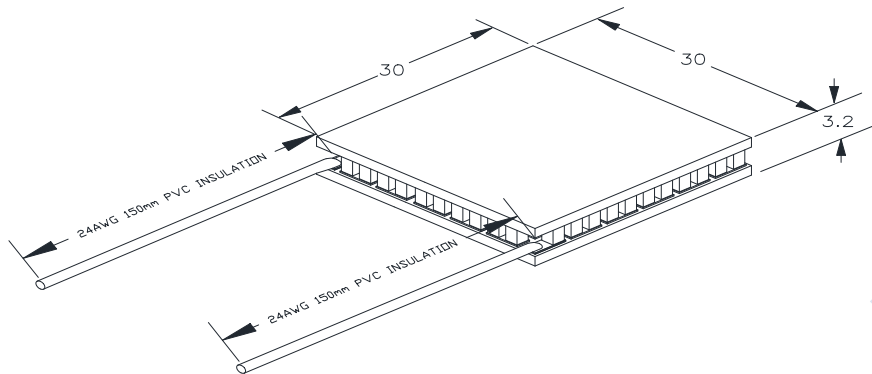**Operation Tips:**

操作提示:

- **Max Operating Temperature: 90°C.**
最大工作温度:90°C
- **Do not exceed I_{max} or V_{max} when operating module.**
不超过最大电流或最大电压操作模块
- **Please consult P&N Technology for moisture and corrosion protection options.**
防潮防腐蚀事项请咨询鹏南科技

Address: 5/F Xinfei Building 28th Xiangming Road, Torch (xiang'an) Hi-tech Zone, Xiamen Fujian China.

地址: 中国福建省厦门火炬高新区(翔安)产业区翔明路28号新飞大厦5楼

Sales Tel: + 86 - 592 - 352 1988

Fax: +86-592-352 1989

Postcode: 361 011

Web: www.pengnantech.com