

Thermoelectric Cooler Performance Specifications


热电模块性能规格书

HP-127060-40X44 W150mm

| | | |
|------------------------------------|-------|-------|
| Hot Side Temperature(°C)热面温度(°C) | 25 °C | 50 °C |
| Qmax (Watts)最大制冷量(w) | 55.0 | 55.8 |
| Delta Tmax(°C)最大温度差(°C) | 68 | 75 |
| I _{max} (Amps)最大输入电流 (A) | 6 | 6 |
| V _{max} (Volts)最大输入电压 (V) | 15.4 | 16.3 |
| ModuleResistance(Ohms)电阻值 (Ω) | 2.23 | 2.52 |





**Tolerances for thermal and electrical parameters ± 10%.

热电参数的公差 ±10%

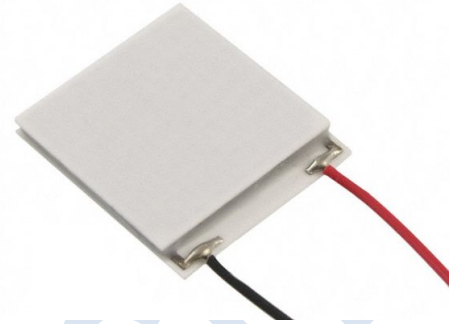


Performance Curves Th=25 °C (性能曲线 Th=25°C)

Performance Curves Th=50 °C (性能曲线 Th=50°C)

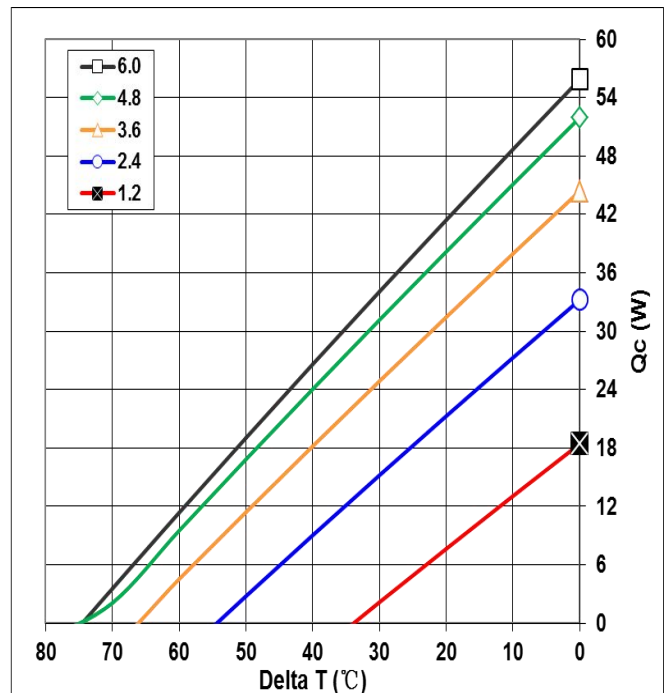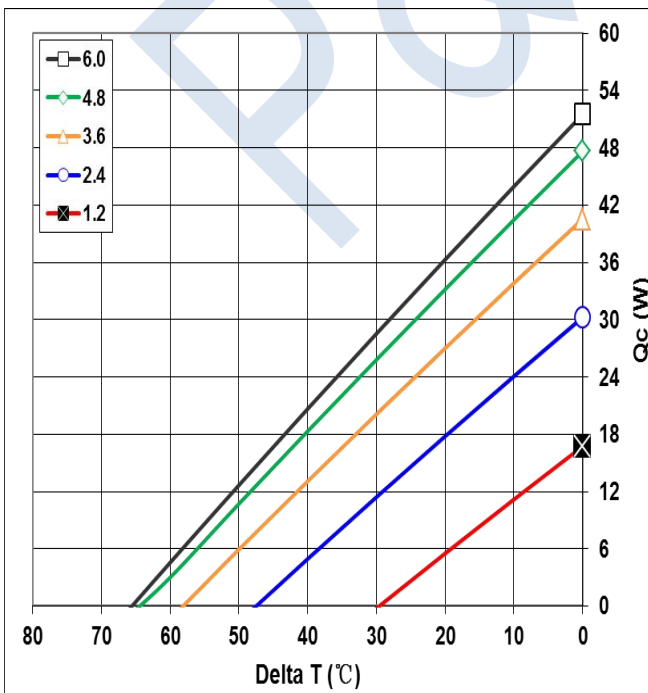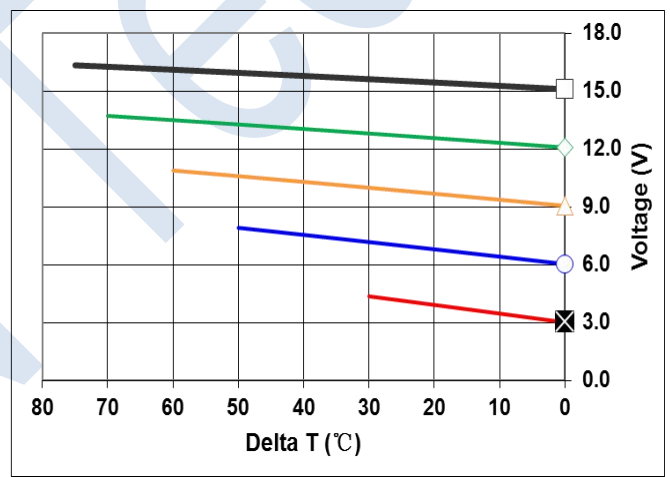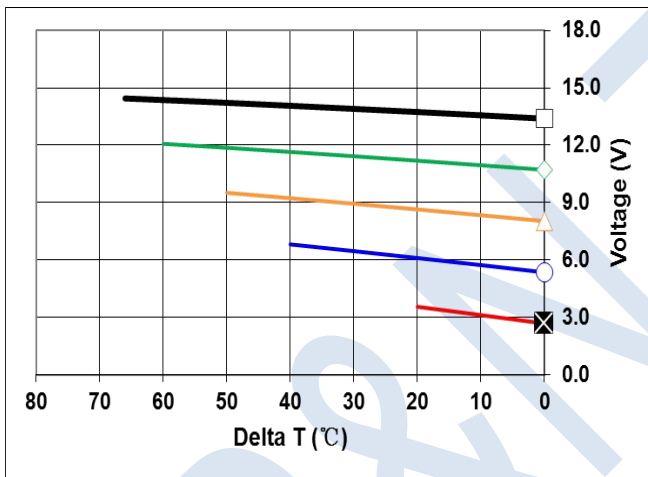

Mechanical Drawing (示意图) :

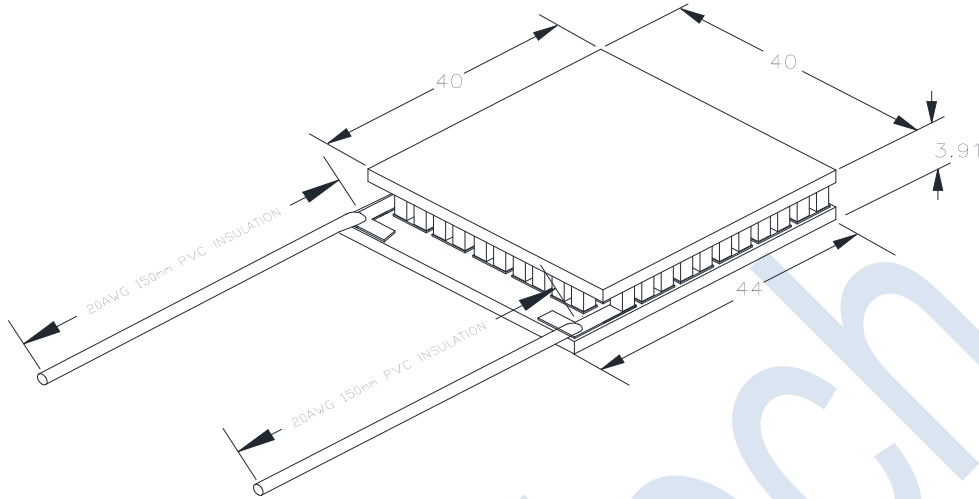**Operation Tips:**

操作提示:

- **Max Operating Temperature: 90°C.**
最大工作温度:90°C
- **Do not exceed I_{max} or V_{max} when operating module.**
不超过最大电流或最大电压操作模块
- **Please consult P&N Technology for moisture and corrosion protection options.**
防潮防腐事项请咨询鹏南科技

Address: 5/F Xinfei Building 28th Xiangming Road, Torch (xiang'an) Hi-tech Zone, Xiamen Fujian China.

地址: 中国福建省厦门火炬高新区(翔安)产业区翔明路28号新飞大厦5楼

Sales Tel: + 86 - 592 - 352 1988**Fax:** +86-592-352 1989**Postcode:** 361 011**Web:** www.pengnantech.com